

Type: _____

Project: _____

Delivered Lumens:
4750 lm

Input Wattage:
45W

Efficacy :
109 lm/W


Colour Temperature:
4000K

Projected Lumen Maintenance:
L₇₀ @ > 100 000 hours

MOUNTING: Surface, chain, aviation cable or pivot wall mounting

HOUSING: 24 ga. sheet steel with grey powder coat finish

INGRESS PROTECTION:
IP66 / wet location rated

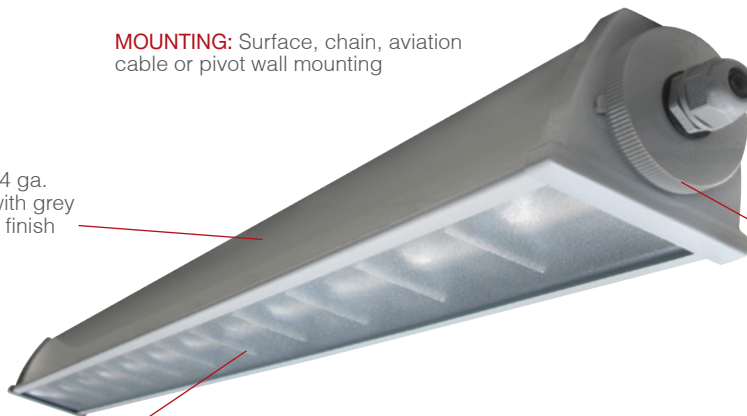

DIFFUSER: Micro-prismatic tempered glass diffuser for reduced glare. IK09 rated strength

APPLICATIONS: The Acciaio[®] Eco is ideal for industrial, warehouses, garages, production, parking decks, platforms, breezeways and storage areas

CONFIGURATIONS

MODEL	LENGTH	OPERATION	POWER	COLOUR TEMPERATURE	INPUT	OPTIONS
BX910LED	4 (4ft)	HT (AC only)	50W	WT40 (4000K)	120-277V	PM (pivot mount)
					347V	AC_1 (aviation cable)

NOTE¹: specify length for AC: 50", 72", 150", 250" fully adjustable

HOUSING:

- IP66 / wet location protection
- 24 ga. sheet steel
- Powder coat finish
- Polycarbonate end caps

ELECTRICAL:

- High-efficiency LED boards
- 96 LEDs total
- Color Temperature: 4000°K
- Driver: 120V-277V, 50-60HZ or 347V, 50-60Hz

WEIGHT: 9 lbs. / 4 kg.

POWER LINE/FEED:

72" black, 18AWG, 600V, 3 conductor cord with 1/2" pre-stripped leads for quick in-field connection

REFLECTOR:

Parabolic polished aluminum reflector

MOUNTING:

- Surface (included) - Stainless steel mounting brackets
- Chain hang kit (included)
- Pivot mount brackets optional for adjustable wall or ceiling mount
- Aviation cable mount, specify length

WARRANTY:



5 year LED warranty, see website for full warranty details

OPERATING TEMP:


-40°C to +40°Ct

DIFFUSER:

- 3mm tempered glass diffuser with microprismatic light distribution
- IK09 impact resistance

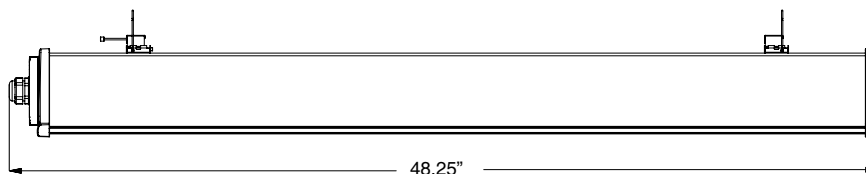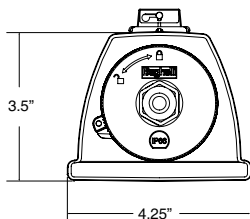

BX910LED-4HT-50W-WT40-120-277V

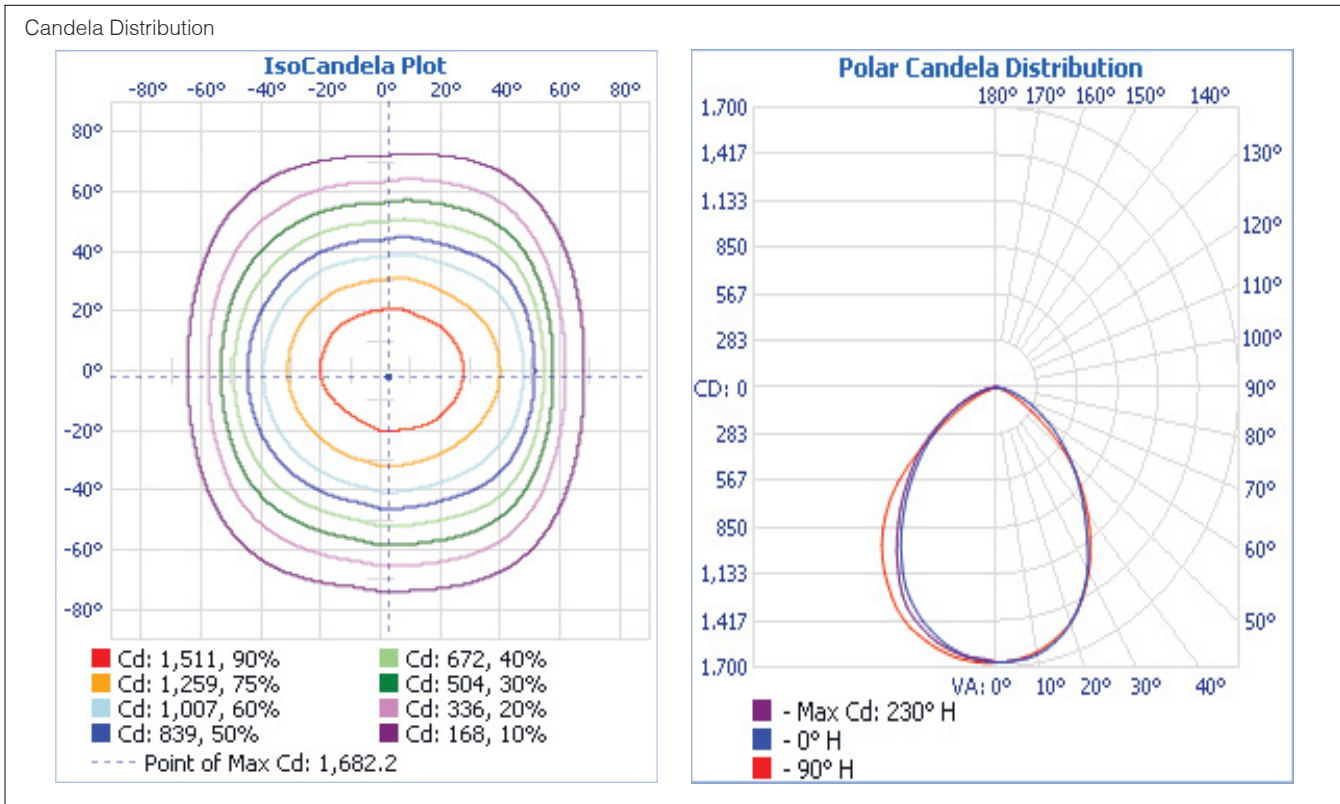

Tested in accordance with IESNA LM-80-08

ENERGY CHART

MODEL	EFFACICY	WATTAGE	LUMEN OUTPUT	CRI	*L70 (HRS.)
BX910LED-4HT-50W-WT40-120-277V	109 lm/W	45 W	4750	80	> 100 000

*Projected