

# 7" Round Spin Light™ - Pull Chain LED

## 11.5 Watt 830lm Round Flushmount Specifications



The ETi 7" Spin Light™ retrofits a common lampholder into a flushmount fixture. The installation is as easy as screwing in a light bulb - yet the Spin Light offers exceptional performance, while reducing energy and maintenance costs when compared with conventional light sources. Using only 11.5 watts of power to deliver 830 lumens and lasting more than 10 times longer, the Spin Light is a high quality replacement for incandescent bulbs or fixtures. Available in 4000K CCT and UL listed for use in damp locations, the Spin Light has a warranty of 5 years. Suitable for installations from - 4° F to 104° F.


### KEY FEATURES & BENEFITS

- Retrofits a lampholder into a flushmount fixture
- Simple to install - Screws into an existing lampholder
- 11.5 Watts - Low Power & High Performance
- 830 lumens
- Rated life 50,000 hours (45.6 years)
- 4000K CCT/84 CRI
- UL Rated for Damp Locations



This light source meets restrictions on hazardous substances.

### FIXTURE DIMENSIONS



SKU# 54617141

Dimension A = 7.0"

Dimension B = 3.5"

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see [www.etiled.us/fcc15b](http://www.etiled.us/fcc15b)

### APPLICATION INFORMATION

Designed to be used anywhere a standard incandescent lamp or fixture is used. Typically used in basements, utility rooms, garages, laundry rooms, and closets. The Spin Light carries a 5 year warranty.



855-384-7754 [www.etissl.com](http://www.etissl.com)

# 7" Round Spin Light™ - Pull Chain LED

## SPECIFICATION DATA

Project \_\_\_\_\_

Item Number \_\_\_\_\_


Prepared by \_\_\_\_\_ Date \_\_\_\_\_

## ORDERING INFORMATION

Item Number	Description	Wattage	Input Voltage (VAC)	Average Rated Life <sup>1</sup>	Typical Lumens <sup>2</sup>	CCT <sup>3</sup>	CRI <sup>4</sup>	Power Factor	R9	Duv	CBCP	Beam	Operating Frequency
54617141	LED11.5w FLUSH-MOUNT 840120 NDIM	11.5	120	50,000	830	4000K	84	>.95	53	.0039	222	120	60Hz
<sup>1</sup> Hours lifetime with 70% lumen maintenance													
<sup>2</sup> Thermally stable typical lumens (±10%)													
<sup>3</sup> Thermally stable CCT (±10%)													
<sup>4</sup> Color rendering index/Ra													

## SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54617141	836607 008985	8.1" x 8.0" x 4.5"	1.3	N/A	N/A	N/A	N/A	5	50836607 008980	8.9" x 23.7" x 9.0"	8.1

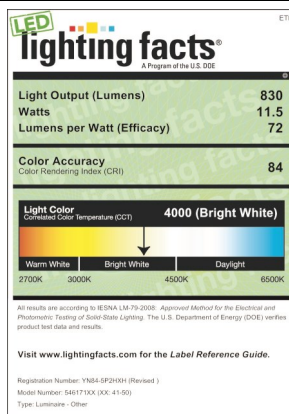

**The Americas Headquarters**  
**720 Corporate Woods Parkway**  
**Vernon Hills, IL 60061**

855-384-7754 www.etissl.com