

# LED-TP7-5M

# IP55

5-Meter (196-7/8") Flexible Indoor/Outdoor LED Tape Light Cabinet, Cove & Display

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

## Features

### Lighting Performance

This energy efficient LED tape produces up to 1950 lumens per roll.

- Warm white : 1800 lumens per roll
- Neutral white : 1950 lumens per roll
- Cool white : 1950 lumens per roll

### Colour Temperature

Available in warm white (3000K), neutral white (4000K) and cool white (6000K) correlated colour temperatures.

### Lumen Maintenance

LEDs reduce ongoing maintenance, has a rated life of over 50,000 hours.

### Power Consumption

These fixtures operate on 24V constant current voltage. Consumes 24W per 5 meter section. Each fixture has a DC 2.1 connector.

### Dimming

The LED tape is dimmable when used with a dimming driver (LED-HWBDIM2-24-40 or LED-HWBDIM3-24-40 – sold separately). See page 2 for driver options.

### Beam Spread

This LED tape provides a 120° linear beam spread to provide even light distribution.

### Operating Temperature

-30°C~50°C (-22°F~122°F).

### Mounting

This flexible LED tape is provided with 3M® high bond adhesive backing that provides secure mounting to smooth surfaces.

### Environment



Suitable for dry, damp and wet locations; IP55 rated.

SPECIFICATIONS	
Application	Undercabinet
Approved Location	Wet
Beam Angle	120°
CCT	3000K / 4000K / 6000K
Certification	cETLus
CRI	70+
Dimming	Yes
Dimming Tech	As per power supply
Link Connector	Waterproof DC 2.1
Lumens	1800 / 1950 / 1950
Lumens per Watt	75.0 / 81.25 / 81.25
Max. Op. Temp.	50°C (122°F)
Min. Start Temp.	-30°C (-22°F)
Power Supply Type	Constant Voltage
Primary Voltage	120V AC
Projected Life	70% @ 50,000 HRS
Secondary Voltage	24V DC
Warranty	3 Years
Wattage	24W



## Description

LED-TP7-5M is a 24V constant voltage 5 meter flexible (indoor/outdoor) LED tape light, operating at 24 watt per 5 meter section (196-7/8"). This LED tape provides ample illumination for residential, retail and commercial accent lighting. Available in warm white (3000K), neutral white (4000K) and cool white (6000K). Suitable for dry, damp and wet locations.

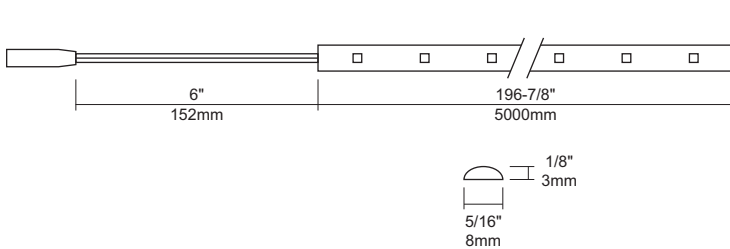

**Notes:** Accessories should be ordered separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

## Ordering Guide

- LED-TP7-5M-30K**  
5-meter flexible LED tape light, 3000K, 24W, 1800 lumens per 5 meter roll.
- LED-TP7-5M-40K**  
5-meter flexible LED tape light, 4000K, 24W, 1950 lumens per 5 meter roll.
- LED-TP7-5M-60K**  
5-meter flexible LED tape light, 6000K, 24W, 1950 lumens per 5 meter roll.

## Additional Colours

- LED-TP7-5M-AM**  
5-meter flexible LED tape light, Amber, 24W, 310 lumens per 5 meter roll.
- LED-TP7-5M-BL**  
5-meter flexible LED tape light, Blue, 24W, 300 lumens per 5 meter roll.
- LED-TP7-5M-GR**  
5-meter flexible LED tape light, Green, 24W, 1300 lumens per 5 meter roll.
- LED-TP7-5M-RD**  
5-meter flexible LED tape light, Red, 24W, 280 lumens per 5 meter roll.

See page 2 for accessories.

## Drivers

---



**LED-DVR-24V-24W**  
LED 24V, 24W Plug-in Driver.



**LED-DVR-24V-36W**  
LED 24V, 36W Plug-in Driver.



**LED-DVR-24V-60W**  
LED 24V, 60W Plug-in Driver.



**LED-HWB-24V-24W**  
LED 24V, 24W Hard wire Box LED Driver.



**LED-HWB-24V-36W**  
LED 24V, 36W Hard wire Box LED Driver.



**LED-HWB-24V-60W**  
LED 24V, 60W Hard wire Box LED Driver.



**LED-DIM 24V**  
LED touch dimmer, 24V (dimmable driver required).

## Dimming Drivers

---



**LED-HWBDIM2-24-40**  
40W LED dimmable driver, 2-wire, 24V.



**LED-HWBDIM3-24-40**  
40W LED dimmable driver, 3-wire, 24V.

## Outdoor Drivers

---



**LED-HW3-24V-60W**  
60W outdoor LED driver, 24V.



**LED-TP-72-PF**  
72" power feed, waterproof DC 2.1 connector to bare leads.

Note: LED-TP-72-PF required with outdoor drivers.

## Accessories

---



**LED-SP-4**  
Optional harness for up to 4 runs, 24V.